




ROMOTE SINGING

Shaas N Hamdan




REMOTE SENSING SCIENCE

- **Remote Sensing:** is the technology by which the object of interest on the earth can be identified, measured, or analyzed remotely (without physical contact) using sensors that reserved waves & applied of the results data on the map
- يتعامل مع الأهداف المتواجدة فوق سطح الأرض وقد بدأ بصناعة الكاميرات لتصوير الأرض من ارتفاعات معينة، ثم أصبح يعتمد على اختراق الغلاف الجوي وتصنيع اللواقط الفضائية sensor حيث يرصد الموجات المنبعثة والمتردة عن الاجسام فوق سطح الارض بواسطة اللواقط لذا فهو يعتمد 90% على اللواقط
- **Sensor:** is a device that detects & responds to some type of input from the physical environment (light, heat, motion...)
- **Remote sensing data (معطيات الاستشعار عن بعد)**
 1. **Reflection:** is the reflection of sun waves from object surface to the sensor & depending on spectral characteristics
 2. **Emission:** is the thermal radiation, by which the source energy is the body itself & depending on thermal characteristics
 3. **Backscattering:** is the reflection of waves back to the direction they came from, & depending on spectral characteristic

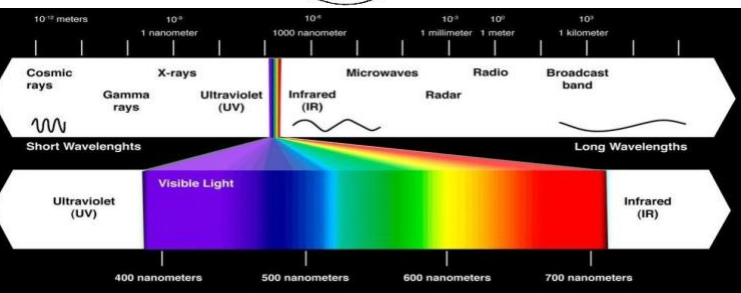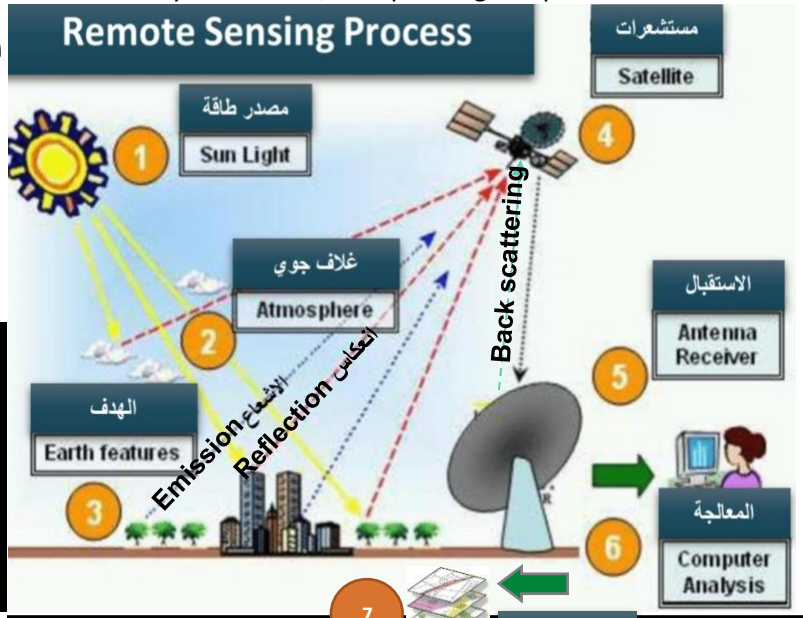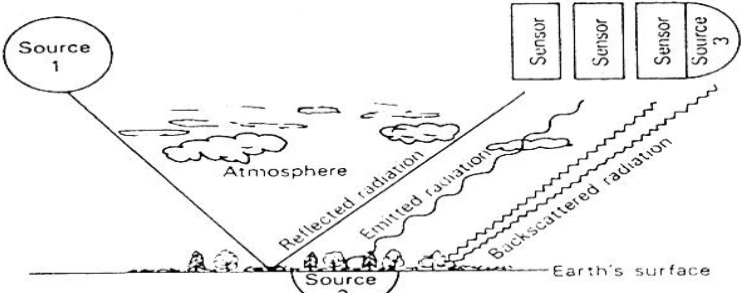


- **Remote Sensing Sciences depends on** Electromagnetic Energy (EM) from sun & wavelength (λ) of sun waves
- **Components of EMR (مكونات الإشعاع الكهرومغناطيسي):**
 1. **Wavelength (λ):** distance between crest & trough
 2. **Amplitude:** distance between axis & crest/trough
 3. **Transmission direction** اتجاه انتشار الموجه
 4. **Polarization Plane** المستوى الذي يحدث عليه الاستقطاب
- **Physical Units of EMR (الوحدات الفيزيائية)**
 1. **Energy (Qe):** the energy carried by EMR in Jules (J)
 2. **Flux (Φ):** is the radiant energy transmitted in a radiant direction per unit of time in Watt (W)
 3. **Intensity (I):** is the radiant flux radiated from a point source per solid angle in radiant direction, Wat/s (solid angle)
 4. **Total Radiance (Le):** is the radiant intensity per unit projected area in a radial direction in $W/m^2/s$
- Usually the sensor reserves the total radiance of any remote singing science type (emitted, reflected, or back scattered)
- **Solid angle:** is the angle between 2 planes or lines

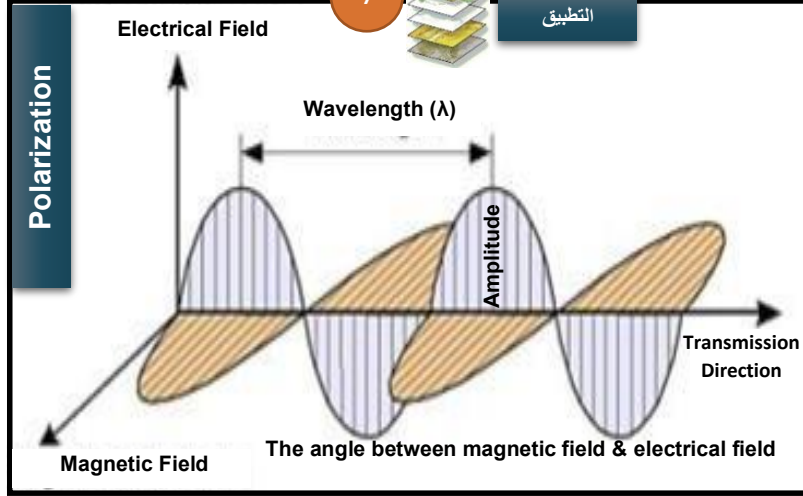

Classification of EMR based on wavelength (λ)		
Wave Type	Wavelength	
Ultraviolet UV	$\lambda = 100\text{\AA} - 0.4\mu\text{m}$	
Visible VL	$\lambda = 0.4\mu\text{m} - 0.7\mu\text{m}$	
Infrared IR	$\lambda = 0.7\mu\text{m} - 1\text{mm}$	
	Near (NIR)	0.7 μm -1.3 μm
	Moderate (MIR)	1.3 μm -3.0 μm
	Short wave (SWIR)	1.3 μm -3.0 μm
	Intermediate (IIR)	3.0 μm -8.0 μm
	Thermal (TIR)	8.0 μm -14 μm
Microwave (Radar)	Far (FIR)	14 μm -1.0mm
	mm Radar (EHF)	1mm-10mm
	cm Radar (SHF)	1cm-10cm


ليس كل موجات الرادار يمكن استخدامها بالاستشعار

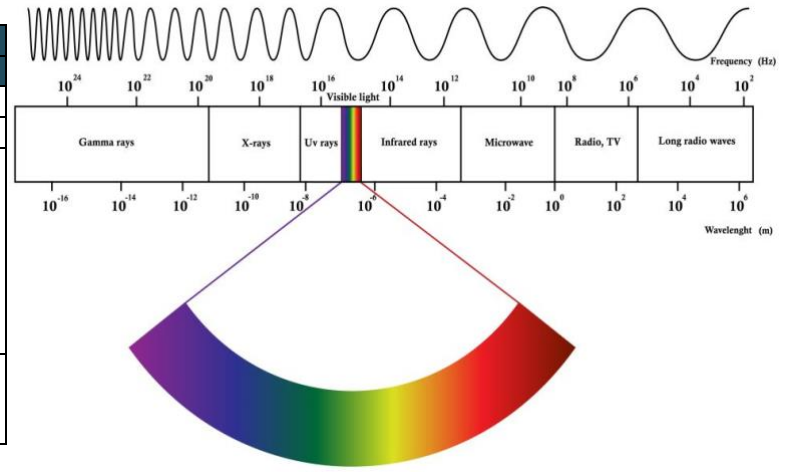

TYPES OF REMOTE SENSING BASED ON WAVELENGTH


Microwave or Radar Remote Sensing science	Sensor	Passive	Active
	Source	Sun or Object	Sensor
	Wavelength	3cm-30cm	3cm-30cm
	Mechanism (Receive)	Reflected, & Emitted Waves	Back Scattering Waves
	Uses	Popular	Rare


ACTIVE REMOTE SENSING




VS

PASSIVE REMOTE SENSING

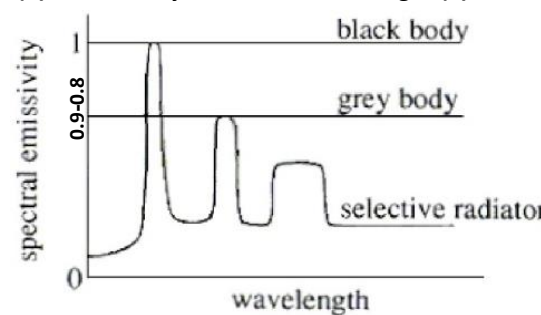

Thermal Remote Sensing Science	<ul style="list-style-type: none"> • Dependings on Black Body idealized physical body that absorb all incident electromagnetic radiation & show the maximum thermal radiation as compared with other opject (perfect thermal radiator) • Plank's Law: thermal radiation of Blackbody (B) is a function of wavelength (λ) & absolute temperature (T) $B(\lambda) = \frac{2hc^2}{\lambda^2} \cdot \frac{1}{e^{\frac{hc}{\lambda T}} - 1} = \frac{1.19 \times 10^{-16}}{\lambda^2} \cdot \frac{1}{e^{\frac{0.0144}{\lambda T}} - 1} \quad [if T \text{ in } ^\circ K \ \& \ \lambda \text{ in } m]$ <p><i>h (Planck's constant) = 6.63x10⁻³⁴J.s, K (Boltzman's constant) = 1.38x10⁻²³J/°K, c (speed of light) = 3x10⁸m/s</i></p> <p><i>Black Body thermal radiation is directly related to temperature (T), & inversely related to wavelength (λ)</i></p> • Brightness Temperature: the equivalent temperature of Blackbody, classified on the basis of Emissivity • Emissivity: ratio of object's thermal radiation to blackbody thermal radiation (1 for blackbody, & 0.8-0.9 for graybody) • Gray body: emits radiant energy with <u>constant emissivity (0.8-0.9)</u> & <u>lower than black body</u> & all objects on the earth surface are gray body • Selective Radiator: is the thermal radiator bodies whose spectral emissivity varies with wavelength 									
Visible & Reflected IR remote sensing science	<ul style="list-style-type: none"> • Albedo: is the ratio of incident radiation flux of object surface to radiation flux from same surface if the source of energy is the sun • Reflection: is the ratio of incident radiant flux of object surface to reflected radiation flux from same surface <p style="text-align: center;">Radiance → Albedo → Digital number</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Energy Source</th> <th>The sun</th> </tr> </thead> <tbody> <tr> <td>λ range</td> <td>0.4μm – 0.3μm</td> </tr> <tr> <td>Mechanism</td> <td>Reflection</td> </tr> <tr> <td>Sensor</td> <td>Passive Sensor Spectral</td> </tr> </tbody> </table>	Energy Source	The sun	λ range	0.4 μ m – 0.3 μ m	Mechanism	Reflection	Sensor	Passive Sensor Spectral
Energy Source	The sun									
λ range	0.4 μ m – 0.3 μ m									
Mechanism	Reflection									
Sensor	Passive Sensor Spectral									

TYPES OF REMOTE SENSING BASED ON RESOLUTION

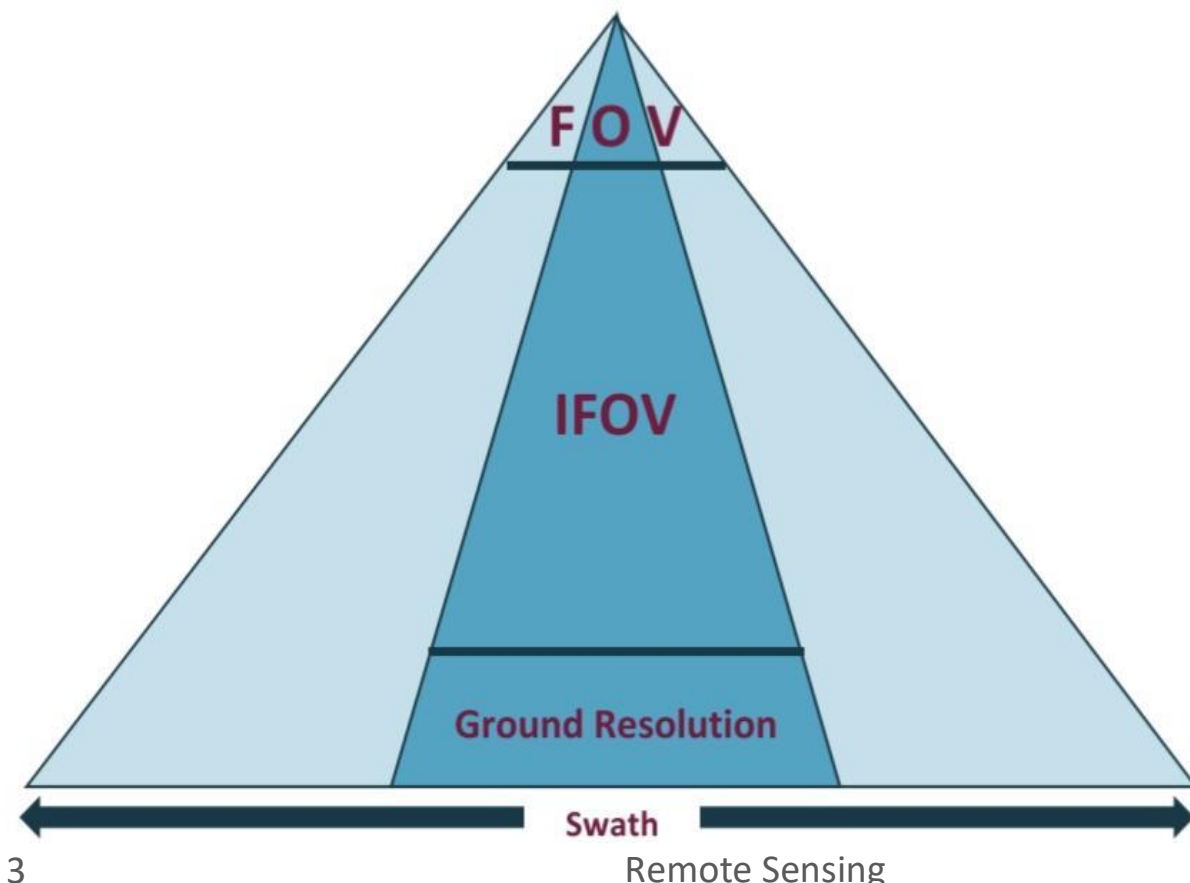

Sensor Operation Concepts

- **FOV: Field of View**
maximum angle by which sensor looks at the swath
- **IFOV: Instantaneous Field of View (unit angle)**
Angle corresponds to the smallest pixel, cover area called ground resolution
- **Ground Resolution**
swath that covered by IFOV (how many pixels correspond to swath?)
- **Swath:** is the total width imaged on the surface
- **Pixel:** is the smallest controllable element of a picture represented on the screen

*The closer the ground resolution to the 1, the more accurate it is
The more the pixels the more clear & details in the image*

Low Ground Resolution Remote Sensing Satellite Sensor

MODIS Moderate Resolution Imaging Spectroradiometer Altitude 705km Swath 2330m Repetitive cycle 1 day Bands 36 →7	Band	Type	G.R	SR	Spot	Type	G.R	SR	Spot	Type	G.R	SR
	250m Ground Resolution				500m Ground Resolution				1000m Ground Resolution			
	B1	Red	250	0.62 – 0.67	B3	Blue	500	0.46 – 0.48	B8	–	1Km	0.46 – 0.48
B2	NIR	250	0.84 – 0.87	B4	Green	500	0.55 – 0.57	
				B5	MIR	500	0.13 – 0.14	
				B6	MIR	500	0.16 – 0.17	
				B7	MIR	500	0.21 – 0.22	B36	–	1Km	0.46 – 0.48	

Moderate Ground Resolution Remote Satellite Sensor

Spot Altitude 832km Swath 60km Repetitive cycle 26 days Bands 3 + 1	Band	Type	G.R	SR	Spot	Type	G.R	SR	Spot	Type	G.R	SR
	20m Ground Resolution				10m Ground Resolution				2.5m Ground Resolution			
	B1	Green	20	0.52 – 0.60	Sp. 1	Pan	10	0.51 – 0.73	Sp. 5	Pan	2.5	0.51 – 0.73
B2	Red	20	0.63 – 0.96	Sp. 2	Pan	10	0.51 – 0.73	Sp. 6	Pan	2.5	0.51 – 0.73	
B3	NIR	20	0.76 – 0.90	Sp. 3	Pan	10	0.51 – 0.73					
				Sp. 4	Pan	10	0.51 – 0.73					

ASTER Altitude 705km Swath 60km Repetitive cycle 16 days Bands 14 (15)	Band	Type	SA	SR	Band	Type	SA	SR	Band	Type	SA	SR
	15m Ground Resolution				30m Ground Resolution				90m Ground Resolution			
	B1	Green	8.9	0.52 – 0.60	B4	MIR	8.9	1.60-1.70	B10	TIR	8.9	8.12-8.47
B2	Red	8.9	0.63 – 0.96	B5	MIR	8.9	2.14-2.18	B11	TIR	8.9	8.47-8.87	
B3n	NIR	8.9	0.76 – 0.90	B6	MIR	8.9	2.18-2.22	B12	TIR	8.9	8.92-9.27	
B3b	NIR	24.8	0.76 – 0.90	B7	MIR	8.9	2.23-2.28	B13	TIR	8.9	10.3-11.0	
				B8	MIR	8.9	2.29-2.36	B14	TIR	8.9	11.0-21.7	
				B9	MIR	8.9	2.36-2.43					

Landsat 8 & Landsat 9 Altitude 705km Swath 185km Repetitive cycle 16 days Bands 11	Band	Type	G.R	SR	Band	Type	G.R	SR	Band	Type	G.R	SR
	30m Ground Resolution				15m Ground Resolution				100m Ground Resolution			
	B1	Costal	30	0.43 – 0.45	B8	Pan	15	0.50 – 0.68	B10	TIR	100 m	10.6 – 11.2
B2	Blue	30	0.45 – 0.52					B11	TIR	100 m	11.5 – 12.5	
B3	Green	30	0.53 – 0.59									
B4	Red	30	0.63 – 0.67									
B5	NIR	30	0.85 – 0.87									
B6	MIR	30	1.57 – 1.65									
B7	MIR	30	2.11 – 2.29									
B9	Cirrus	30	1.36 – 1.38									

Landsat ETM Altitude 705km Swath 185km Repetitive cycle 16 days Bands 8(7)+1	Band	Type	G.R	SR	Band	Type	G.R	SR	Band	Type	G.R	SR
	30m Ground Resolution				60m Ground Resolution				15m Ground Resolution			
	B1	Blue	30	0.45 – 0.52	B6a	TIR	60	10.4 – 12.5	B8	Pan	15 m	0.52 – 0.90
B2	Green	30	0.52 – 0.60	B6b	TIR	60	10.4 – 12.5					
B3	Red	30	0.63 – 0.96									
B4	NIR	30	0.76 – 0.90									
B5	MIR	30	1.55 – 1.75									
B7	MIR	30	2.09 – 2.35									

Landsat TM Altitude 705km Swath 185km Repetitive cycle 16 days Bands 7	Band	Type	G.R	Spectral Resolution [μm]	Band	Type	G.R	Spectral Resolution
	30m Ground Resolution				120m Ground Resolution			
	B1	Blue	30	0.45 – 0.52	B6	TIR	120	10.4 – 12.5
B2	Green	30	0.52 – 0.60					
B3	Red	30	0.63 – 0.96					
B4	NIR	30	0.76 – 0.90					
B5	MIR	30	1.55 – 1.75					
B7	MIR	30	2.08 – 2.35					

High Ground Resolution Remote Sensing Satellite Sensor




IKONOS Altitude 681km Swath 20km Repetitive C 1.3-3 days Bands 4+1	Band	Type	G.R	Spectral Resolution [μm]	Band	Type	G.R	Spectral resolution
	4m Ground Resolution				1m Ground Resolution			
	B1	Blue	4	0.45 – 0.52	B5	Pan	1 m	0.45 – 0.90
B2	Green	4	0.52 – 0.60					
B3	Red	4	0.63 – 0.96					
B4	NIR	4	0.76 – 0.90					

Quick Bird Altitude 450km Swath 16.5km Repetitive cycle 3-7 days Bands 4+1	Band	Type	G.R	Spectral Resolution [μm]	Band	Type	G.R	Spectral resolution
	2.4m Ground Resolution				1m Ground Resolution			
	B1	Blue	2.4	0.45 – 0.52 μm	B5	Pan	0.6	0.45 – 0.90 μm
B2	Green	2.4	0.52 – 0.60 μm					
B3	Red	2.4	0.63 – 0.96 μm					
B4	NIR	2.4	0.76 – 0.90 μm					

- **Multispectral Band Conditions:** reserved from same sensor by reflection mechanism, have same G.R & different spectral resolution
- **Altitude:** is the distance between the sensor & the earth's surface (measured at the equator)
- **Repetitive Cycle:** is the time required for sensor to back to the same point

MULTISPECTRAL BANDS RECORDING & DIGITAL IMAGES

Methods of Multispectral Bands Recording

Band Sequential (BSQ)	Data is recorded band by band (e.g Quick Bird) is the most common method <ul style="list-style-type: none"> Start at the 1st pixel of the 1st band & then the 2nd pixel of the first band, then 3rd... When finishes the 1st band, goes to the 2nd & repeats the steps 	
Band Interleaved by Line (BIL)	The data is recorded Line-by-Line <ul style="list-style-type: none"> The first line of each band is recorded (all pixels in the first line of 1st band, then pixels of the 1st line of second band... etc), then the second line... etc 	
Band Interleaved by Pixel (BIP)	The first pixels of the first line of each band is recorded then the second pixels from the same line, then the third pixels from the same line....etc & as finish the first line goes to the second line & repeats the steps	

- Methods of Data Dumping from sensors:** Ground Receiving Stations (GRS) & Space Receiving Stations (SRS)

Media of Remote Sensing Data Storage

Types	Storage	Notes	Types	Storage	Notes
Linear Tape Open (LTO)	Up to 4 TB	Used by centers	Digital Versatile Disk (DVD)	Up to 5 GB	Used by users
External Hard Disk (HD)	Up to 2 TB	Used by users	Compact Disk (CD)	Up to 700 MB	Used by users
Flash Memory (USB)	Up to 128 GB	Used by users	Floppy Disk Drive (FDD)	Low	Used in the past

- Ground Truth:** is a ground reference data base, or any measured on the ground & earth's surface, or is the information provided by direct observation, as opposed to information provided by inference
- Data classification:** the data classified into **Primary data** (data from the field), & **Secondary data** (data on a map)

Purposes of Using Ground Truth

Before Operation	Sensor Design (e.g. NIR Bands)
After Operation	Validation, Calibration, & Supplement <ol style="list-style-type: none"> Validation & Calibration: are pixels check, & if there's something wrong, it's repaired in same band Supplement (Analysis & Correction): you must correct north direction & astronomical coordinates

- Ground Control Points (GCP) نقاط التحكم الأرضية:** part of ground truth, & must be **Fixed ثابتة & Distinct مميزة**
ليست كل نقطة ثابتة مميزة فمثلا نقطة منتصف الغرفة ثابتة لكنها غير مميزة (ليست GCP) ولكن زوايا الغرفة ثابتة ومعروفة لذا هي مميزة (GCP) ليست كل نقطة مميزة ثابتة فمثلا نقطة تعبر عن قارب في نهر ليست ثابتة ولكنها مميزة
- Ways of collecting GCP:** Field Work (GPS), Topographic Map (Map to Image), Corrected or Geocoded Image (Image to Image)
- Conditions of Geometric Correction Performance:**
 - Enough numbers of GCPs for full scene (full swath):** for 1 swath we have 6GCP, & for quarter swath we have 15-20GCP
 - The data should be well distributed:** separation of the image into 4 parts (4 squares) with equal number of GCP
 - Root Mean Square Error (RMSE) must be <0.5pixel**

DIGITAL IMAGE PROCESSING & INTERPRETATIONS

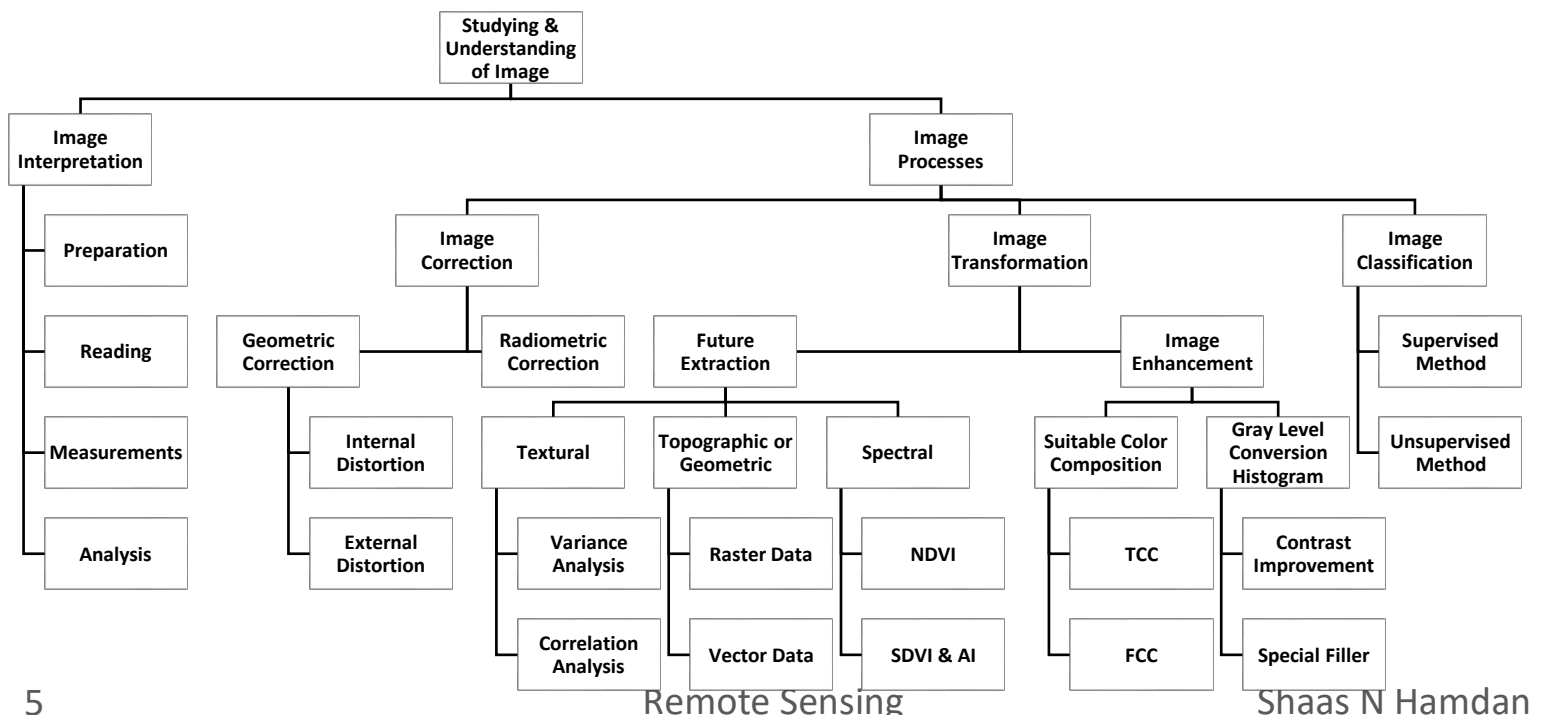


Image Interpretation تفسير المرئيات	Is the extract of quantitative & qualitative information using <i>human knowledge & satellite image</i>					
	Extraction Information	Image Classification	Change Detection	Extraction of Indices	Physical Quantities Extraction	Specific Feature Identification
	Example	Rock, soil, vegetation...	Land cover / use change	Vegetation index (NDVI)	Height elevation (DEM), thermal remote sensing	Floods & forest fire
	Advantage: Knowledge is available, & Interpretation is better Disadvantage: Need specialists, high time; cost; & effort					
	Procedures	Steps				
	Preparation (Pre-work)	Data collection & Geometric correction: correction of North direction & astronomical coordinates To obtain suitable image: Goals & Area of the study, Sensor type, & Bands taken into account				
Reading	Interpretation of keys, shape, & pattern					
Measurement	Length & area					
Analysis	Determine of object evaluation					

Image Processing معالجة المرئيات	Advantage Short time, Extraction, Physical quantity, Standardization Dis. Difficult Interpretation, Transform knowledge					
	Image Correction	Radiometric or Geometric (geometric may external or internal distortion)				
	Image Transformation	Features Extraction, & Image Enhancement				
	Image Classification	Supervised, or Unsupervised				

Image Correction: is the correction of north direction & astronomical coordination

Radiometric	<ul style="list-style-type: none"> it's not your responsibility (as user) to perform radiometric correction, it is center responsibility (such as NASA) Causes: Sensor Sensitivity, Solar Angle or Sun Angle, & Conditions of atmosphere 		Scale Error	Projection Error
	Geometric	Internal	<p>Cause: Problems in sensor design</p> <p>Types: Scale Error, & Projection Error</p> <p>It's center responsibility to perform correction (not users)</p>	Shift Error
External		<p>Cause platform variation height, Earth curvature</p> <p>Types: Shift Error, Earth Curvature Error</p> <p>It's users responsibility: performed using GCPs</p>		

Image Transformation : Image Enhancement

Is the increase or improvement in quality of the image & deals with Gray Color Data components


The main objective of image enhancement is to improve the visual interpretation الهدف هو تحسين التفسير بواسطة النظر

Methods: Suitable Color Composition, & Gray Level Conversion Histogram

Suitable Color Composition	The Color Composition Conditions are:																																																											
	<ol style="list-style-type: none"> RGB Color Screen: must have the colored filters (Red R, Green G, Blue B) Three multispectral Bands: must use only 3 multispectral bands over the RGB filters No repetition of same band over 2 filters 																																																											
	Example: Quick Bird sensor has 4 multispectral bands, so 24 color can be made																																																											
	True Color Composition	<p>To perform TCC (True Color Composition) you must assign on (RGB) filters in which each band should be seen on its filter (red band on red filter, blue band on blue filter, & green band on green filter)</p> <ul style="list-style-type: none"> If all bands are found in the sensor (RGB) you can make a TCC & if one of the bands is lost, there is no TCC Each sensor has only & only one TCC & any other composition is FCC Visual Interpretation of TCC: the colors in image are the same of their natural color 																																																										
<table border="1"> <tr> <th>TCC for all sensors</th> <th>Sensor Filters</th> <th colspan="3">MODIS</th> <th colspan="3">LandSat 8-9</th> <th colspan="3">LandSat ETM</th> <th colspan="3">LandSat TM</th> <th colspan="3">IKONOS</th> <th colspan="3">Quick Bird</th> </tr> <tr> <td></td> <td></td> <td>R</td><td>G</td><td>B</td> <td>R</td><td>G</td><td>B</td> <td>R</td><td>G</td><td>B</td> <td>R</td><td>G</td><td>B</td> <td>R</td><td>G</td><td>B</td> <td>R</td><td>G</td><td>B</td> </tr> <tr> <td></td> <td>Bands</td> <td>1</td><td>4</td><td>3</td> <td>4</td><td>3</td><td>2</td> <td>3</td><td>2</td><td>1</td> <td>3</td><td>2</td><td>1</td> <td>3</td><td>2</td><td>1</td> <td>3</td><td>2</td><td>1</td> </tr> </table> <p>SPOT & ASTER sensors don't have TCC, because lack of the blue band</p>		TCC for all sensors	Sensor Filters	MODIS			LandSat 8-9			LandSat ETM			LandSat TM			IKONOS			Quick Bird					R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B		Bands	1	4	3	4	3	2	3	2	1	3	2	1	3	2	1	3	2
TCC for all sensors	Sensor Filters	MODIS			LandSat 8-9			LandSat ETM			LandSat TM			IKONOS			Quick Bird																																											
		R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B																																									
	Bands	1	4	3	4	3	2	3	2	1	3	2	1	3	2	1	3	2	1																																									
False Color Composition	<p>FCC is important because some sensors (SPOT & ASTER) don't include TCC</p> <ul style="list-style-type: none"> You can determine the area of vegetation using the NIR band & the visual interpretation are: 																																																											
	Visual Interpretation																																																											
	If we put NIR band in the Green filter regardless of other filters	>98% of green color are represent the vegetation areas because leaves have high response for NIR																																																										
	If we put NIR band in the Blue filter regardless of other filters	>98% of blue color are represent the vegetation areas because the leaves have high response for NIR																																																										
If we put NIR band in the Red filter regardless of other filters	>98% of red color are represent vegetation because the leaves have high response for NIR																																																											

Image as a binary format use 1 or 2 bytes & satellite image use 1 byte
 1byte = 8 bit = 2⁸ or 256 levels of Gray color or LGC


- **Color Table:** is a table on the computer software represents the levels of the colors & for gray color the gray color fixed at 128 & if moves towards 0 the gray become darker until reaches black at 0, if we move toward 256 the gray color become lighter until reaches the weight color at 256
256 LGC (light gray color) → Digital Number (DN) → 0 to 256 (integer DN)
- As we select enhancement we are force the software to use highest gray color levels as possible in order to improve visual interpretation

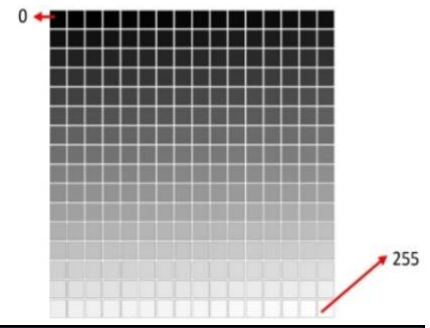

Steps of Gray Levels Conversion

Contrast Improvement


Is the improves the contrast in the curved pattern using linear or non linear mathematical equations that leads to force software to use the highest gray level as possible (which are not used before) then the image becomes clear in order to improve visual interpretation

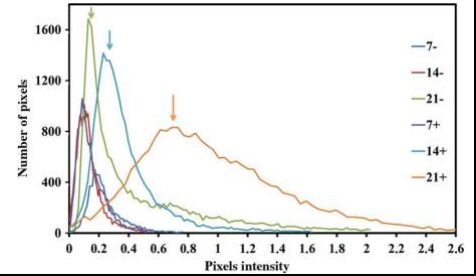

Spatial Filters

Spatial filters: filter used to make visual interpretation for images with speckle noise possible

- **Speckle noise (salt & pepper):** black & white points on the digital image that make interpretation difficult
- Used for microwave (radar) images, because images of active radar system have speckle noise

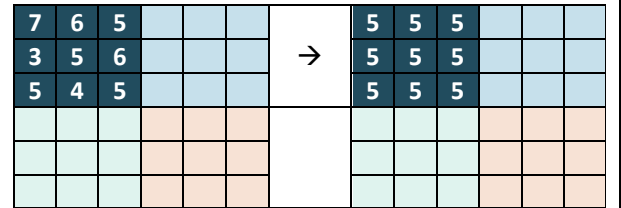

لو اخترنا نافذة (3*3) و فلتر Average فإن البرمجية ستقسم المرئية لنوافذ كل واحدة (3*3) وتطبق المعادلة على كل نافذة

Working conditions of Spatial filters:

1. **Choose window size:** should be odd number (3*3pixels, 5*5pixels, 7*7pixels,..., 33*33pixels)
2. **Choose filter type** (Statistical equation): e.g. Median Filter, Mode Filter, Mean Filter...

بهذه الطريقة نحن نخسر بعض المعلومات عن ال gray levels وبالتالي يجب أن نقيها بأقل حجم ممكن لتقليل الخسائر بالمعلومات

Image Transformation : Future Extraction

Spectral Features

- Very important because represents spectral characteristics of object & can be studied by Vegetation Indices

NDVI: Normalized Difference Vigitation Index, used for vegetation type classification & land degradation studies

$$NDVI \text{ (Normalized Difference)} = \frac{NIR - Red}{NIR + Red} = (-1, +1)$$

+ve for area with vegetation cover - ve if there's no vegetation

The equation is applied in the form of pixel based that mean all corresponding pixels between 2 bands (Red & NIR)

$$SAVI \text{ (Soil Adjusted Vegetation Index)} = \frac{NIR - Red}{NIR + Red + L} = (-1, +1)$$

L = 1 for rare plants, L = 0 for dense vegetation, L = 1/2 for arid to simi-arid areas (e.g. Jordan)

يعتمد تطبيق إحدى المعادلتين (SAVI & NDVI) على تصنيف منطقة الدراسة من ناحية مناخية (مناطق جافة او رطبة) وحتى نستطيع تصنيف المناطق نعتمد على معادلة Aridity Index (AI) على ان تكون القراءات على الاقل ل 20 سنة مضت

$$AI = \frac{Avg \text{ Rainfall}}{Avg \text{ Evapotranspiration}}$$

AI	Area Classification	Zones
≤0.05	Hyper Arid Area	Arid Zone SAVI & L=0.5
0.05-0.2	Arid Area	
0.2-0.5	Simi-Arid Area	Humid Zone NDVI
0.5-0.65	Sub-Humid Area	
≥0.65	Humid Area	

Textural Features


The texture of the image is the relationship between spectral data & gray levels. If you have a homogeneous object in a part of an image, the Gray levels of pixels that should have the same (almost the same) Gray levels

- In order to to analyze phenomena, statistical laws must be used & statistical relationship between objectives must be found & laws are applied in the size of odd window (e.g. 3*3)


Correlation Texture Analysis: Inter Low (0) or High (1) Correlation

Variance Texture Analysis: Inter low(0) or high (1) variance


Gray-level Image



Numeric Gray-levels



SMARTARTS

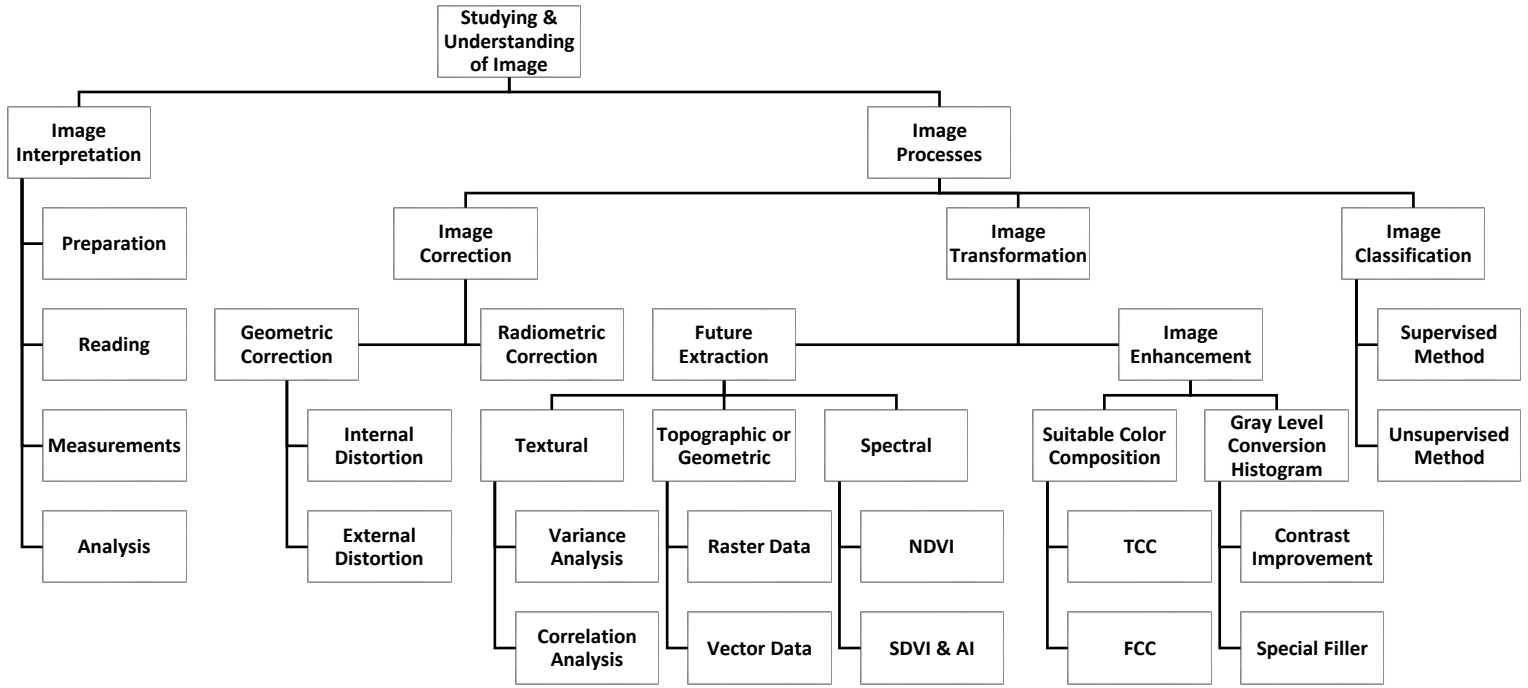

Studying & Understanding of Image require 2 steps

